

*Aurora*



# Aurora

## 6,500 Watt Generator

Model AGI6500DE & AGI6500SDE



ETL (Intertek) is a nationally recognized testing laboratory. They have certified these generators to UL and CSA standards. These are higher standards that other companies don't follow. We use only high quality certified components. These superior generators are a result of building it right and paying attention to even the smallest details. We built our reputation on quality not quantity.

The two generators shown here are ideal for portable power. The engines are diesel so they are stronger and last longer than others. They run so clean that there is no visible smoke or unpleasant smell. This is all thanks to new EPA emission regulations. Engines can work harder, last longer and still be extremely fuel efficient.

A starter battery is included, so you can easily start the generator by turning a key. For cold weather starting, a glow plug and decompression lever is installed. Other generators that don't have one are not as easy to start. On the enclosed silenced unit, go ahead and start it from one of the two included remote controls. It is a popular feature that many make use of.

Plug devices directly to any of the four regulator outlets. The fifth larger outlet is used for easy hookup to a home transfer switch. Sensitive electronics are safer on generators like these. This is because an automatic voltage regulator is used.

Look at the digital panel meter to monitor engine run time, output voltage and frequency. You can even adjust it if necessary.

You will appreciate how easy it is to use and service if required. All parts, manuals and instructional videos are available on our website. You can talk to one of our mechanics, electricians or service professionals if you ever need help.

We pride ourselves in quality and customer satisfaction.

Generator Model	AGI6500SDE	AGI6500DE
Engine	Enclosed Silent	Open Frame
Price	\$1,199.00	\$1,599.00
Noise Level	< 69 db	< 85 db
Weight	340 lb.	263 lb.
Dimensions	36.2" x 20.9" x 29.1" 980 x 580 x 770 mm	28.25" x 19" x 23.5" 718 x 843 x 597 mm
Engine	Direct Injection Single Cylinder Diesel Aurora 186 12 HP Motor	
Fuel Type	Automotive Diesel Fuel Only	
Fuel Tank Size	3.9 Gallons	3.3 Gallons
Engine RPM	3600	3600
Starting System	Electric Start + Remote Control Electric Start	Electric Start + Manual Recoil
Alternator	Automatic Voltage Regulated Class F Insulated Certified to UL and CSA standards 22.2 No 100	
Peak Generator Output	6500 Watts	6500 Watts
Continuous Output	5000 Watts	5000 Watts
Panel Outlets	4 x 120 volts rated @ 20 amps 1 x 240 volts rated @ 30 amps 1 x 12 volts rated @ 8.3 amps	4 x 120 volts rated @ 20 amps 1 x 240 volts rated @ 30 amps 1 x 12 volts rated @ 8.3 amps
Panel Features	Digital Multimeter. Volt Meter, Frequency Country and Hour Meter.	
Warranty	1 Year / 1000 Hr non-commercial	1 Year / 1000 Hr non-commercial
Specifications are subject to change without warning		

It is your responsibility to research and follow all laws and regulations concerning the ownership, use and installation of any power generator. Licensed professionals may be required and special permits maybe necessary before you can use this product. Improper use may harmful and can even kill you. Never use a generator indoors.

Perkins diesel engines have earned a reputation for having the longest service life. The engines are more fuel efficient and produce less noise. They are the best that money can buy. Many customers use them as their only source of power. Even those who do not depend on generators for full time use will appreciate having the highest quality available.

Perkins has a large global network of distributors and dealers that keep parts and support close to customers throughout the world. They are also a subsidiary of Caterpillar.

We match the Perkins engines with high quality maintenance free alternators. We help to protect sensitive electronics by only using Automatic Voltage Regulators. Automatic Transfer Switches built into the generator means you just set it, and forget it. The generator will start and stop automatically as needed.

The super strong canopy is designed on a CAD system. The material has been laser cut and precision welded. The electrostatic spray painting methods used ensures a heavier and more even paint coating. Automotive grade weather stripping around all windows and doors keep your generator dry inside. The belly hides a large fuel tank. Every generator also includes a starter battery. For standalone operation all you need to purchase is coolant, lube oil and fuel.

All wires are crimped, soldered and covered in heat shrink tubing. Each one is labeled for easy identification. The fuse holders illuminate if one should fail. If service is ever required, downtime is significantly reduced.

Open up the big doors on either side of the generator. Look inside and you will see how easy it is to access to the air, oil and fuel filter. There is even a hand valve you turn to drain the oil. You do not need any special tools. Perkins recommend oil changes every 500 hours, not 200 like others.

With Perkins engine global product warranty and support plus Aurora Generators warranty coverage, we guarantee you will be happy with your choice of generator.



Generator Model	AGI9XP
Engine	Perkins 403D-11G Direct Injection 3 Cylinder 1.1 L Diesel 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	10,000 Watts
Continuous output power	9,000 Watts
Weather Proof Enclosure	62" x 32" x 39"
Weight	1090 lb. / 494 kg
Belly fuel tank	70 Liters / 18.5 Gallons
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	83.3 amps @ 120 volts 41.7 amps @ 240 volts
Fuel Consumption	2.3 L / Hr @ 75% Load 0.6 g / Hr @ 75% Load
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	Deep Sea Electronics DSE3110
Warranty	1 Year / 1000 Hours Aurora   Perkins Engine Warranty






Take the enclosure off the Aurora 10,000 watt silent diesel generator and you have this less expensive version. Customers still enjoy the high quality engine, generator head and controller. Best of all, there is no extra charge for the belly fuel tank or battery. Many other companies charge extra for this. The electrical panel is mounted on the side of the generator instead of in front of it. The generator is smaller and lighter without the canopy. Normally the canopy is used to keep everything weatherproof and reduce noise levels. This model is often used for indoor installation so it is not required.

Open up the panel door and you have easy access to all the wiring. Each one is crimped, soldered and covered in heat shrink tubing. Each wire is also labeled for easy identification. Service is much easier on this generator.

The generator head is maintenance free and brushless. The output voltage is extremely stable because the generator uses an automatic voltage regulator. This is much safer for sensitive electronics than generators without it.

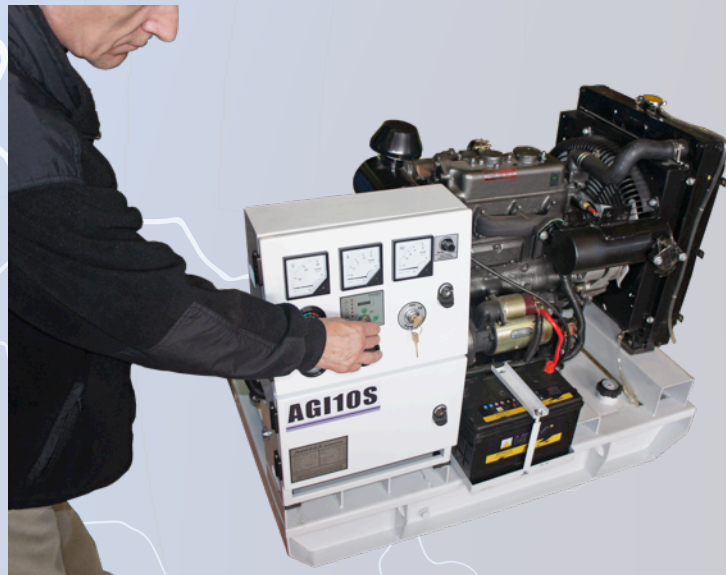

Generator Model	AGI10XO
Engine	Laidong Model KM385 Direct Injection 3 Cylinder 1.53L Diesel Engine 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	10,000 Watts
Continuous output power	9,000 Watts
Weather Proof Enclosure	49" x 30" x 49"
Weight	950 lb. / 431 kg
Belly fuel tank	70 Liters / 18.5 Gallons
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	83.3 amps @ 120 volts 41.7 amps @ 240 volts
Fuel Consumption	g/kW.Hr 265 (grams per kilowatt hour) (Less than 0.5 gallons per hour under full load)
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	Deep Sea Electronics DSE3110
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details



Introducing the most popular backup diesel generator Aurora manufactures. Operation is simple. Turn the key on, preheat if necessary and then just press the start button. Within seconds, it produces enough power for most home appliances.

The super strong canopy was designed on a CAD system. The material has been laser cut and precision welded. Electrostatic spray painting ensures a heavier and more even paint coating. Automotive grade weather stripping has also been used around all panels and doors. The belly of each unit hides a large fuel tank. Every generator includes a starter battery. Often all that is required for setup is coolant, lube oil and fuel.

All wires have been crimped, soldered and covered in heat shrink tubing. Each one is also labeled for easy identification. The fuse holders also illuminate if one should fail. All these features make repair simple and help to reduce downtime should service ever be required.

The high quality maintenance free alternator is brushless. The bearing is sealed and requires no lubrication. An automatic voltage regulator insures output is stable under changing load conditions. This makes Aurora generators much safer for use with sensitive electronics.

Changing the air, oil or fuel filter is easy on this model. The unique design leaves lots of space to work with. You will find performing your own general maintenance much easier



Generator Model	AG10XS
Engine	Laidong Model KM385 Direct Injection 3 Cylinder 1.53L Diesel Engine 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	10,000 Watts
Continuous output power	9,000 Watts
Weather Proof Enclosure	62" x 32" x 39"
Weight	1250 lb. / 567 kg
Belly fuel tank	70 Liters / 18.5 Gallons
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	83.3 amps @ 120 volts 41.7 amps @ 240 volts
Fuel Consumption	g/kW.Hr 265 (grams per kilowatt hour) (Less than 0.5 gallons per hour under full load)
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	Deep Sea Electronics DSE3110
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details



Set it and forget it. This fully automatic generator is designed to power most homes. It provides enough power to run just about anything inside. The built in ATS (Automatic Transfer Switch) monitors your mains power. If an outage occurs, the generator starts up automatically. When power is restored, it shuts down.

The super strong canopy was designed on a CAD system. The material has been laser cut and precision welded. Electrostatic spray painting ensures a heavier and more even paint coating. Automotive grade weather stripping has also been used around all panels and doors. The belly of each unit hides a large fuel tank. Every generator includes a starter battery. Often all that is required for setup is coolant, lube oil and fuel.

All wires have been crimped, soldered and covered in heat shrink tubing. Each one is also labeled for easy identification. The fuse holders also illuminate if one should fail. If repair is ever required, downtime is greatly reduced because of these details.

The high quality maintenance free alternator is brushless. The bearing is sealed and requires no lubrication. An automatic voltage regulator insures output is stable under changing load conditions. This makes Aurora generators much safer for use with sensitive electronics.

The unique design leaves plenty of space inside. Changing the air, oil and fuel filters is easy. Most users can perform their own routine maintenance.

Generator Model	AGI20XS
Engine	Laidong Model 4L22BD Direct Injection 4 Cylinder 2.156 L Diesel Engine 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	16,000 Watts
Continuous output power	16,000 Watts
Weather Proof Enclosure	78" x 32" x 41"
Weight	1650 lb. / 748 kg
Belly fuel tank	70 Liters / 18.5 Gallons
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	133 amps @ 120 volts 67 amps @ 240 volts
Fuel Consumption	g/kW.Hr 272 (grams per kilowatt hour) (Less than 1.1 gallons per hour under full load)
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	Deep Sea Electronics DSE3110
Automatic Transfer Switch	250 Amp 3 poll Transfer Switch - Installed
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details



It is your responsibility to research and follow all laws and regulations concerning the ownership, use and installation of any power generator. Licensed professionals may be required and special permits maybe necessary before you can use this product. Improper use may harmful and can even kill you. Never use a generator indoors.





Perkins diesel engines have earned a reputation for having the longest service life. The engines are more fuel efficient and produce less noise. They are the best that money can buy. Many customers use them as their only source of power. Even those who do not depend on generators for full time use will appreciate having the highest quality available.

Perkins has a large global network of distributors and dealers that keep parts and support close to customers throughout the world. They are also a subsidiary of Caterpillar.

We match the Perkins engines with high quality maintenance free alternators. We help to protect sensitive electronics by only using Automatic Voltage Regulators. Automatic Transfer Switches built into the generator means you just set it, and forget it. The generator will start and stop automatically as needed.

The super strong canopy is designed on a CAD system. The material has been laser cut and precision welded. The electrostatic spray painting methods used ensures a heavier and more even paint coating. Automotive grade weather stripping around all windows and doors keep your generator dry inside. The belly hides a large fuel tank. Every generator also includes a starter battery. For standalone operation all you need to purchase is coolant, lube oil and fuel.

All wires are crimped, soldered and covered in heat shrink tubing. Each one is labeled for easy identification. The fuse holders illuminate if one should fail. If service is ever required, downtime is significantly reduced.

Open up the big doors on either side of the generator. Look Inside and you will see how easy it is to access to the air, oil and fuel filter. There is even a hand valve you turn to drain the oil. You do not need any special tools. Perkins recommend oil changes every 500 hours, not 200 like others.

With Perkins engine global product warranty and support plus Aurora Generators warranty coverage, we guarantee you will be happy with your choice of generator.

Generator Model	AGI20XS
Engine	Perkins 402-D22 Direct Injection 4 Cylinder 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	20,000 Watts
Continuous output power	19,000 Watts
Weather Proof Enclosure	78" x 32" x 41"
Weight	1650 lb. / 748 kg
Belly fuel tank	70 Liters / 18.5 Gallons
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	167 amps @ 120 volts 83 amps @ 240 volts
Fuel Consumption	g/kW.Hr 272 (grams per kilowatt hour) (Less than 1.1 gallons per hour under full load)
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	Deep Sea Electronics DSE3110
Automatic Transfer Switch	250 Amp 3 poll Transfer Switch - Installed
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details



Perkins diesel engines have earned a reputation for having the longest service life. The engines are more fuel efficient and produce less noise. They are the best that money can buy. Many customers use them as their only source of power. Even those who do not depend on generators for full time use will appreciate having the highest quality available.

Perkins has a large global network of distributors and dealers that keep parts and support close to customers throughout the world. They are also a subsidiary of Caterpillar.

We match the Perkins engines with high quality maintenance free alternators. We help to protect sensitive electronics by only using Automatic Voltage Regulators. Automatic Transfer Switches built into the generator means you just set it, and forget it. The generator will start and stop automatically as needed.

The super strong canopy is designed on a CAD system. The material has been laser cut and precision welded. The electrostatic spray painting methods used ensures a heavier and more even paint coating. Automotive grade weather stripping around all windows and doors keep your generator dry inside. The belly hides a large fuel tank. Every generator also includes a starter battery. For standalone operation all you need to purchase is coolant, lube oil and fuel.

All wires are crimped, soldered and covered in heat shrink tubing. Each one is labeled for easy identification. The fuse holders illuminate if one should fail. If service is ever required, downtime is significantly reduced.

Open up the big doors on either side of the generator. Look Inside and you will see how easy it is to access to the air, oil and fuel filter. There is even a hand valve you turn to drain the oil. You do not need any special tools. Perkins recommend oil changes every 500 hours, not 200 like others.

With Perkins engine global product warranty and support plus Aurora Generators warranty coverage, we guarantee you will be happy with your choice of generator.

Generator Model	AGI30XS
Engine	Perkins 404D-22TAG 2.216 L Turbo Diesel 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	30,000 Watts
Continuous output power	28,000 Watts
Weather Proof Enclosure	2489 x 1092 x 1626 98" x 43" x 64"
Weight	2200 lb. / 998 kg
Belly fuel tank	220 Liter / 58 Gallon
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	250 amps @ 240 v 125 amps @ 120 v
Fuel Consumption 75% Load	g/kW.Hr 231 (grams per kilowatt hour) 6.5 L / Hr
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	
Automatic Transfer Switch	250 Amp 3 poll Transfer Switch - Optional
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details





Perkins diesel engines have earned a reputation for having the longest service life. The engines are more fuel efficient and produce less noise. They are the best that money can buy. Many customers use them as their only source of power. Even those who do not depend on generators for full time use will appreciate having the highest quality available.

Perkins has a large global network of distributors and dealers that keep parts and support close to customers throughout the world. They are also a subsidiary of Caterpillar.

We match the Perkins engines with high quality maintenance free alternators. We help to protect sensitive electronics by only using Automatic Voltage Regulators. Automatic Transfer Switches built into the generator means you just set it, and forget it. The generator will start and stop automatically as needed.

The super strong canopy is designed on a CAD system. The material has been laser cut and precision welded. The electrostatic spray painting methods used ensures a heavier and more even paint coating. Automotive grade weather stripping around all windows and doors keep your generator dry inside. The belly hides a large fuel tank. Every generator also includes a starter battery. For standalone operation all you need to purchase is coolant, lube oil and fuel.

All wires are crimped, soldered and covered in heat shrink tubing. Each one is labeled for easy identification. The fuse holders illuminate if one should fail. If service is ever required, downtime is significantly reduced.

Open up the big doors on either side of the generator. Look Inside and you will see how easy it is to access to the air, oil and fuel filter. There is even a hand valve you turn to drain the oil. You do not need any special tools. Perkins recommend oil changes every 500 hours, not 200 like others.

With Perkins engine global product warranty and support plus Aurora Generators warranty coverage, we guarantee you will be happy with your choice of generator.

Generator Model	AGI40XS
Engine	Perkins 1104D-44TG1 4.41 Liters Turbo Diesel 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	40,000 Watts
Continuous output power	38,000 Watts
Weather Proof Enclosure	2489 x 1092 x 1626 98" x 43" x 64"
Weight	2800 lb. / 1270 kg
Belly fuel tank	220 Liter / 58 Gallon
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	333 amps @ 120 v 167 amps @ 240 v
Fuel Consumption 75% Load	9.0 L / Hr
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	HGM6120
Automatic Transfer Switch	Transfer Switch - Optional
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details



Perkins diesel engines have earned a reputation for having the longest service life. The engines are more fuel efficient and produce less noise. They are the best that money can buy. Many customers use them as their only source of power. Even those who do not depend on generators for full time use will appreciate having the highest quality available.

Perkins has a large global network of distributors and dealers that keep parts and support close to customers throughout the world. They are also a subsidiary of Caterpillar.

We match the Perkins engines with high quality maintenance free alternators. We help to protect sensitive electronics by only using Automatic Voltage Regulators. Automatic Transfer Switches built into the generator means you just set it, and forget it. The generator will start and stop automatically as needed.

The super strong canopy is designed on a CAD system. The material has been laser cut and precision welded. The electrostatic spray painting methods used ensures a heavier and more even paint coating. Automotive grade weather stripping around all windows and doors keep your generator dry inside. The belly hides a large fuel tank. Every generator also includes a starter battery. For standalone operation all you need to purchase is coolant, lube oil and fuel.

All wires are crimped, soldered and covered in heat shrink tubing. Each one is labeled for easy identification. The fuse holders illuminate if one should fail. If service is ever required, downtime is significantly reduced.

Open up the big doors on either side of the generator. Look Inside and you will see how easy it is to access to the air, oil and fuel filter. There is even a hand valve you turn to drain the oil. You do not need any special tools. Perkins recommend oil changes every 500 hours, not 200 like others.

With Perkins engine global product warranty and support plus Aurora Generators warranty coverage, we guarantee you will be happy with your choice of generator.

Generator Model	AGI50XS
Engine	Perkins 1104D-44TG1 4.41 Liters Turbo Diesel 1800 RPM
Cooling System	Radiator Liquid Cooled
Fuel	Automotive Diesel Fuel
Peak Output Power	50,000 Watts
Continuous output power	45,000 Watts
Weather Proof Enclosure	2489 x 1092 x 1626 98" x 43" x 64"
Weight	2910 lb. / 1320 kg
Belly fuel tank	220 Liter / 58 Gallon
Alternator	Brushless and Maintenance Free
Voltage Regulator	Automatic Voltage Regulator +- 1%
Output Voltage (Adjustable)	120 / 240 volts single phase.
Peak Output Current	417 amps @ 120 v 208 amps @ 240 v
Fuel Consumption 75% Load	12.8 L / Hr
Starting System	Fully Automatic via Controller
Cold Start	Engine Glow Plugs Installed
Generator Controller	HGM6120
Automatic Transfer Switch	Transfer Switch - Optional
Warranty	1 Year / 1000 Hours Parts See Aurora Generators for complete details



Aurora Diesel Generators come in different sizes and power ranges. We offer a selection of engine brands and features but, no matter what one is chosen, all are designed to last over 10,000 hours.

The canopy is solid. Many refer to it as a "tank". This is because it was designed on a CAD system. The material has been laser cut, precision welded and electrostatic painted. Automotive grade weather stripping has also been used around all panels and doors. The belly of each unit hides a large fuel tank. Every generator includes a starter battery. Often all that is required for setup is coolant, lube oil and fuel.

All wires have been crimped, soldered and covered in heat shrink tubing. Each one is also labeled for easy identification. The fuse holders also illuminate if one should

fail. All these features make repair simple and reduce downtime should service ever be required.

The high quality maintenance free alternators are all brushless. They use sealed bearing that require no lubrication. An automatic voltage regulator is installed in the alternator. Output power is much cleaner and safer for use with sensitive electronics.

Automatic Transfer Switches are built into most generators. If they detect a power failure, they tell the generator to start running. The ATS then switches off the failed power source and lets your home feed off the generator. When normal power is restored, they safely switch back and shut down automatically.

The generators are designed with plenty of space inside. Air, oil and fuel filter changes are easy. Most users can perform their own routine maintenance.

The following tables show some comparison between each model. Additional specifications, videos and detailed photographs are also available.



AGI9XP	AGI10X	AGI20X	AGI20XP	AGI24XP	AGI30XP	AGI40XP	AGI50XP
9,000 Watts	10,000 Watts	16,000 Watts	20,000 Watts	24,000 Watts	30,000 Watts	40,000 Watts	50,000 Watts
Perkins Engine 404D-22G	Laidong Engine KM385	Laidong Engine 4L22BD	Perkins Engine 404D-22	Perkins Engine 404D-22TG	Perkins Engine 404D-22TAG	Perkins Engine 1104D-44GT1	Perkins Engine 1104D-44GT1
\$7,499.00	\$5,499.00	\$7,499.00	\$9,499.00	\$12,900.00	\$15,499.00	\$16,900.00	\$17,900.00
Automatic Transfer Switch Optional	Automatic Transfer Switch Optional	Automatic Transfer Switch Included	Automatic Transfer Switch Included	Automatic Transfer Switch Included	Automatic Transfer Switch Optional	Automatic Transfer Switch Optional	Automatic Transfer Switch Optional
Generator Controller DSE3110	Generator Controller DSE3110	Generator Controller DSE3110	Generator Controller DSE3110	Generator Controller DSE3110	Generator Controller HGM6120	Generator Controller HGM6120	Generator Controller HGM6120
1524x762 x991 mm 60" x 30" x 39"	1524x762 x991 mm 60" x 30" x 39"	1981x813x1041mm 78" x 32" x 41"	1981x813x1041mm 78" x 32" x 41"	2000 x 1000 x 1350 78.4 x 39.4 x 53.2"	2489 x 1092 x 1626 98" x 43" x 64"	2489 x 1092 x 1626 98" x 43" x 64"	2489 x 1092 x 1626 98" x 43" x 64"
75 amps @ 120 v 37.5 amps @ 240 v	83.3 amps @ 120 v 41.6 amps @ 240 v	133 amps @ 120 v 67 amps @ 120 v	167 amps @ 120 v 83 amps @ 240 v	200 amps @ 120 v 100 amps @ 240 v	250 amps @ 240 v 125 amps @ 120 v	333 amps @ 120 v 167 amps @ 240 v	417 amps @ 120 v 208 amps @ 240 v
1090 lb. / 494 kg	1250 lb. / 567 kg	1650 lb. / 748 kg	1610 lb. / 730 kg	1705 lb. / 773 kg	2200 lb. / 998 kg	2800 lb. / 1270 kg	2910 lb. / 1320 kg
•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator	•Belly Fuel Tank •Battery •Glow Plugs •Automatic Voltage Regulator •Brushless Maintenance Free Alternator
Perkins Engine Warranty plus Aurora 1 Year 1000 Hr Electrical	Aurora 1 Year / 1000 Hr	Aurora 1 Year / 1000 Hr	Perkins Engine Warranty plus Aurora 1 Year 1000 Hr Electrical	Perkins Engine Warranty plus Aurora 1 Year 1000 Hr Electrical	Perkins Engine Warranty plus Aurora 1 Year 1000 Hr Electrical	Perkins Engine Warranty plus Aurora 1 Year 1000 Hr Electrical	Perkins Engine Warranty plus Aurora 1 Year 1000 Hr Electrical

# Aurora



Aurora Generators Inc.  
16 Industrial Parkway South  
Aurora Ontario  
L4G0R4  
Canada  
1-877-510-6807

Aurora Generators Inc.  
1619 Coastal Highway  
Lewes Delaware  
19958-9776  
USA  
1-877-510-6807

[www.AuroraGenerators.com](http://www.AuroraGenerators.com)

A member of the Better Business Bureau  
©Aurora Generators Inc.

Aurora Generators Inc. reserves the right to discontinue, change at any time, specifications or designs without notice or without incurring obligations.